

QDX Series



QDX

Specification

- 5 m maximum immersion depth;
- Liquid Temperature up to 40°C;
- The grain diameter of the solids in the water is no bigger than 0.2mm.
- The PH figure of the water is between 6.5~8.5;
- Insulation class: F
- Protection class: IP68


Application

- Clean water without abrasive particles.
- For domestic use ,for civil and industrial applications.
- For garden use and irrigation.
- Water Supply ,drainage in breeding industry


Material

- Pump body: Cast Aluminum
- Motor Bracket: Cast Aluminum
- Impeller: Aluminum
- Motor Shaft: CS45#
- 100% Copper Winding

Performance Curve

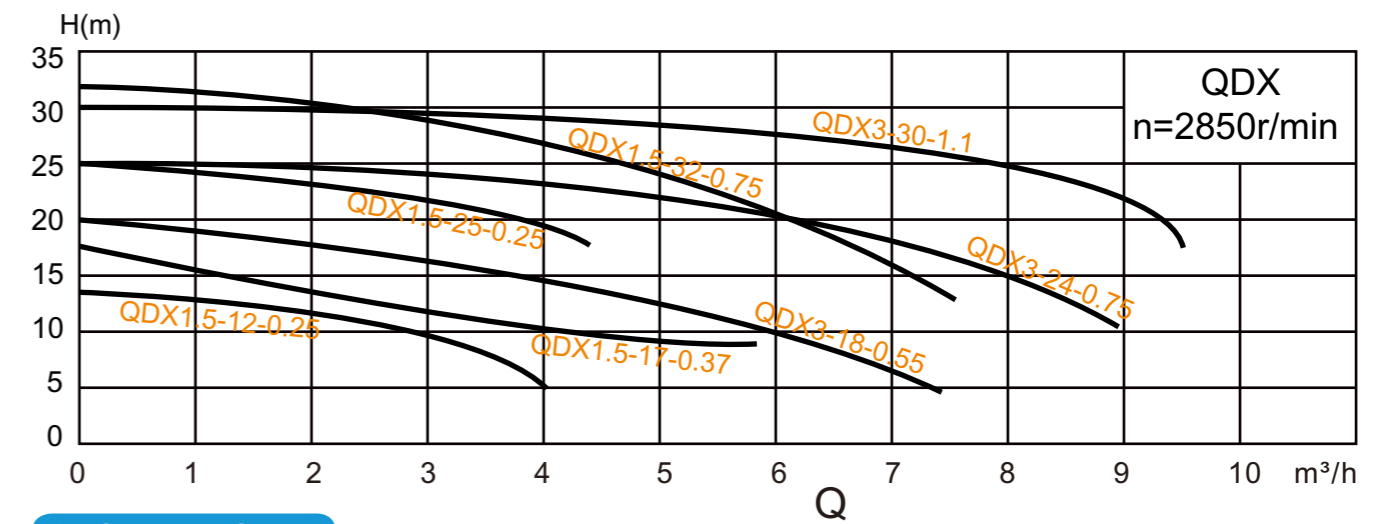

Performance Curve

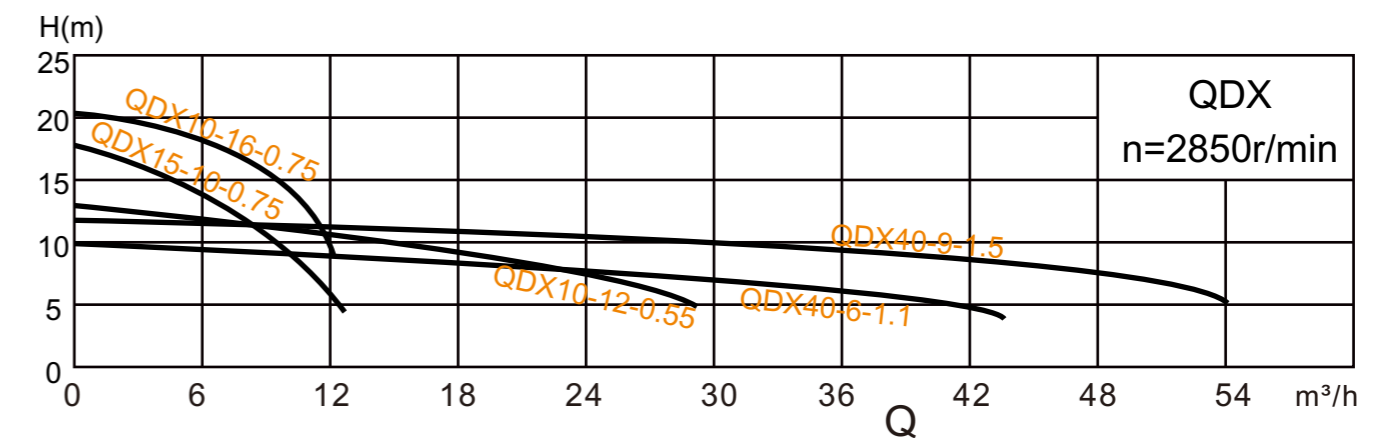

Model (50/60Hz)	Power		Outlet (inch)	Max. Flow (L/min)	Max. Head m³/h	Rated Flow (m)	Rated Head m³/h	Weight m	Packing dimension mm
	(kw)	HP							
QDX1.5-12-0.25	0.25	0.37	1	4.7	13	1.5	12	5	365*165*173
QDX1.5-17-0.37	0.37	0.5	1	6	18	1.5	17	7	370*160*203
QDX1.5-25-0.55	0.55	0.75	1	6.5	26	1.5	25	10	370*105*218
QDX3-18-0.55	0.55	0.75	1.25	8	19.5	3	18	10	370*195*213
QDX10-12-0.55	0.55	0.75	1.5	13.8	15	10	12	10	370*195*213
QDX1.5-32-0.75	0.75	1	1	7	32.5	1.5	32	12	380*220*228
QDX3-24-0.75	0.75	1	1.25	9	25	3	24	12	395*195*208
QDX15-10-0.75	0.75	1	2.5	36	10	15	6	11.5	395*195*228
QDX10-16-0.75	0.75	1	2	15	20	10	16	11.5	395*195*233
QDX3-30-1.1	1.1	1.5	1	9.5	30	3	30	13.5	440*220*205
QDX40-6-1.1	1.1	1.5	3	52	10	40	6	16	450*280*200
QDX40-9-1.5	1.5	2	3	60.5	11.2	40	9	18	450*280*200